BACK TO INDEX

KIMRAY, Inc.

PNEUMATICALLY ADJUSTED PRESSURE REDUCING BALANCED REGULATORS

Okla. City, OK

APPLICATIONS:

Used to regulate downstream pressure. Downstream pressure is regulated to match the pneumatic signal sent to the pilot. Downstream pressure remains constant through changes in upstream pressure.

DOWNSTREAM PRESSURE RANGE:

3 psig to 125 psig

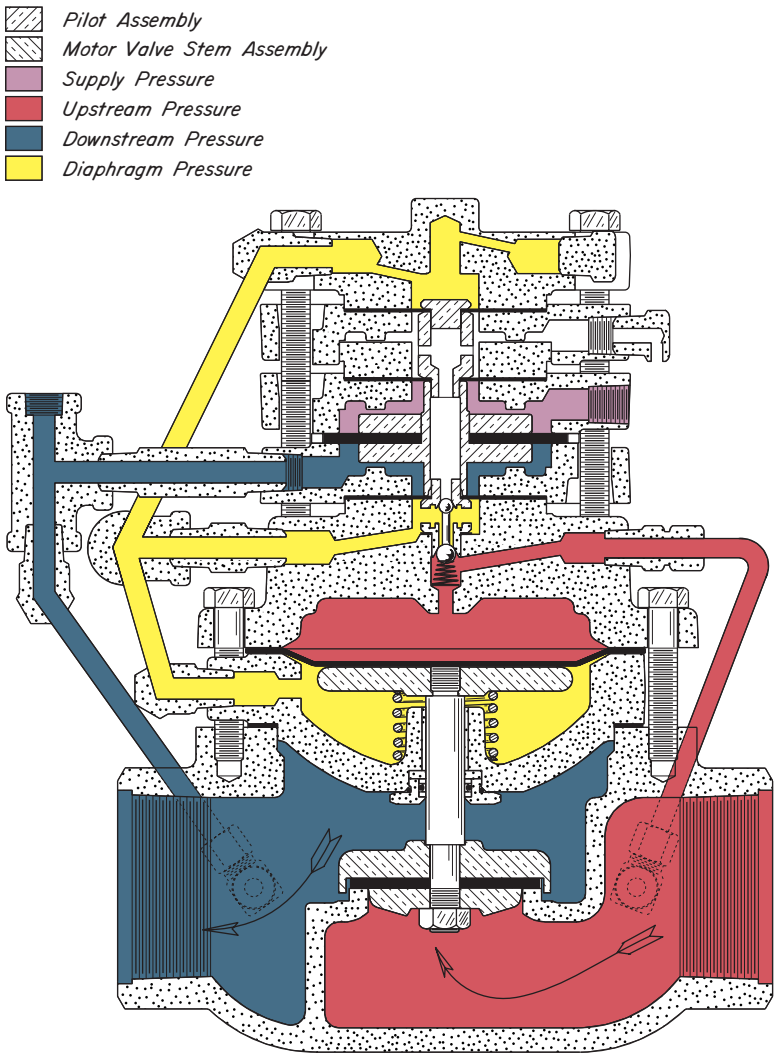

BACK TO INDEX

2", 3", 4" & 6" SGT PA-PRB
CAST IRON
125 lbs. W.P.

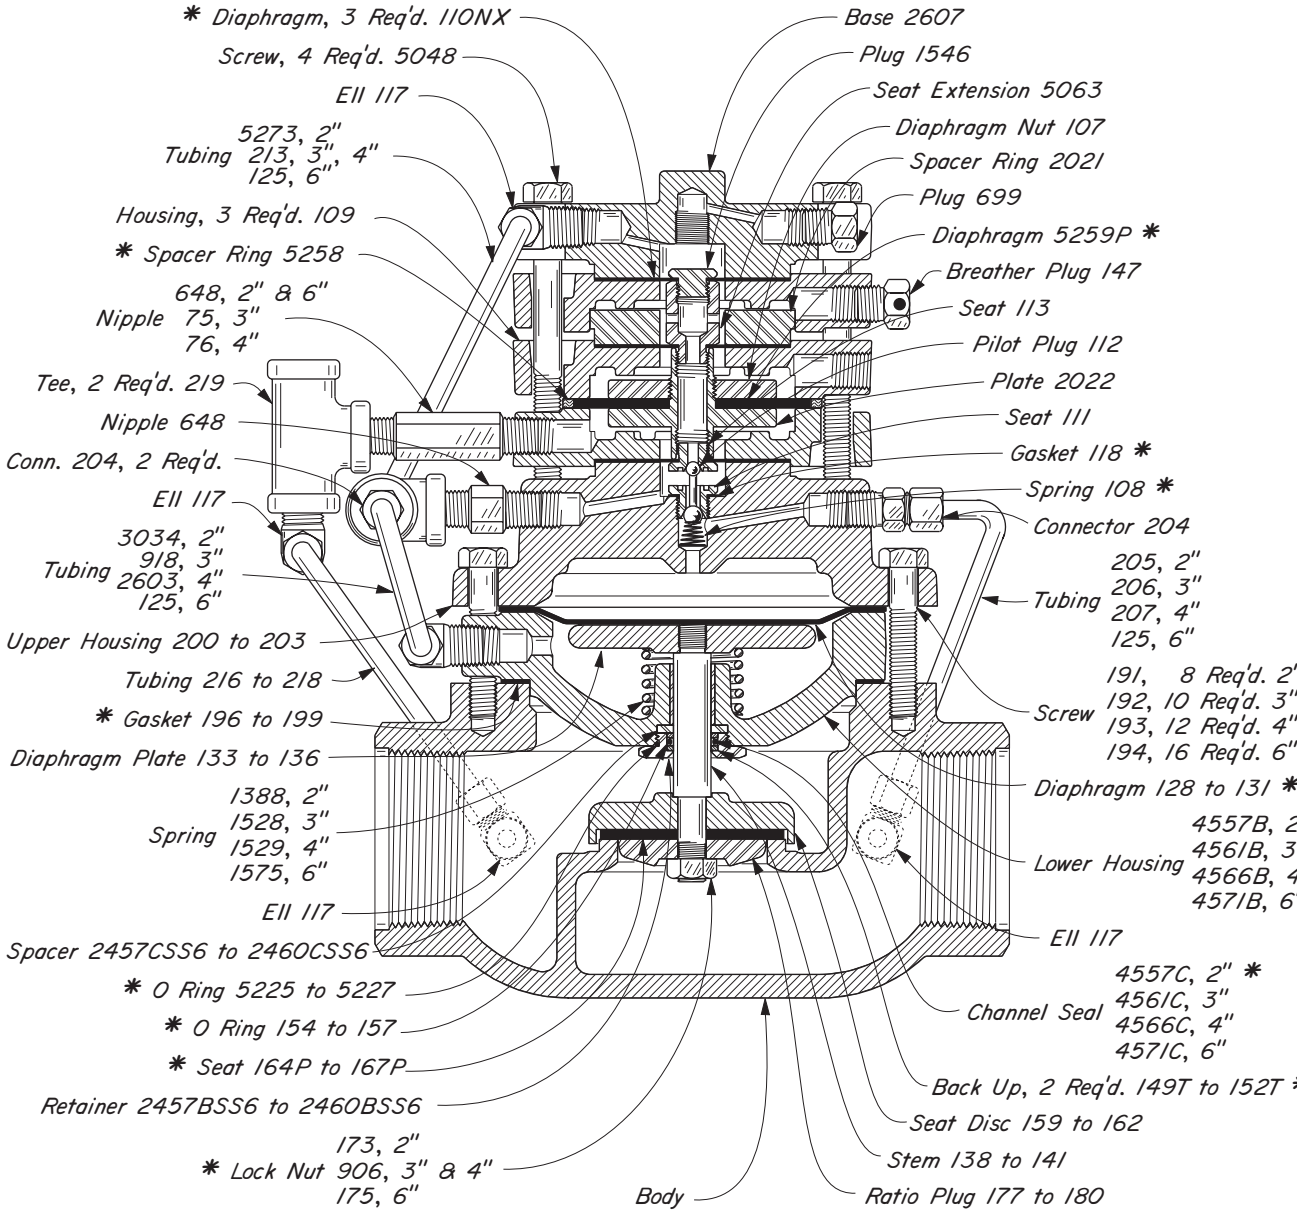

LINE SIZE	BODIES	
	SCREWED	FLANGED
2"	183	184
3"	185	186
4"	187	188
6"	----	189

VALVES AVAILABLE: DUCTILE IRON

CAT. NO.	SIZE	TYPE	REG. NO	DES. PRESS.	OPER. PRESS.
AJA-PNU	2"	SCRD.	212 SGT-PA PRB	125	125
AJD-PNU	3"	SCRD.	312 SGT-PA PRB	125	125
AJE-PNU	3"	FLGD.	312 FGT-PA PRB	125	125
AJF-PNU	4"	SCRD.	412 SGT-PA PRB	125	125
AJG-PNU	4"	FLGD.	412 FGT-PA PRB	125	125
AJH-PNU	6"	FLGD.	612 FGT-PA PRB	125	125

*These are recommended spare parts and are stocked as repair kits. To order repair kit, specify: "2" PRB-PNU Repair Kit, RRI-PNU; 3" PRB-PNU Repair Kit, RRJ-PNU; 4" PRB-PNU Repair Kit, RRK-PNU; 6" PRB-PNU Repair Kit, RRL-PNU;

NOTE: The numbers of a series assigned to a part indicate different line sizes. For example: Seat 164P-2", 165P-3", 166P-4", 167P-6".