

[View this product on Kimray.com](https://www.kimray.com)

## EGE 2 FMVT 600RF PB 2 IN IV

Metering Valve

**Piston Balanced**  
**2" 600 RF Through Body**  
**2" Equal Percentage Trim**

Process Fluid: **Liquid and Gas**  
Operation: **Manual**




Critical Flow Factor (Cf) = 0.76

100% Cv = **57.00**

Cv @ % Stem Travel (%open)									
10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
2	4	6	8	11	20	33	45	51	57

Flow Coefficient (CV) at Stem Travel (% Open) for Item: EGE

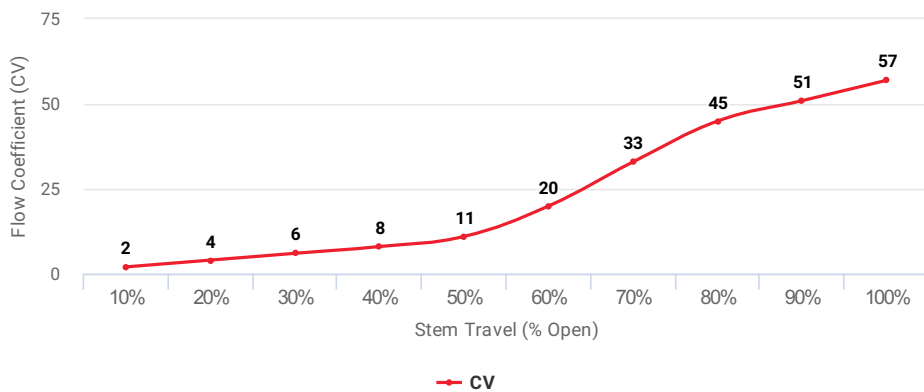

Can be used to meter or control flow of liquids and/or gases on meter runs or flow lines. It can be used as a choke under low pressure drop conditions where freezing is not a problem. Used any time a reference control point is required in 64ths of an inch opening.

## Specifications

Connection Size: **2 "**  
Connection Type: **600 RF**  
Body Style: **Through Body**  
Body Material: **Steel**  
**Option Available for NACE MR0175 compliance or certification.**  
Trim Size: **2 "**  
Trim Type: **Equal Percentage**  
Seal Class: **Class VI**  
Process Fluid: **Liquid and Gas**  
Max. Working Pressure: **1480 psig**  
Operation: **Manual**  
Catalog Page: **E1:55.2**  
Face-to-Face Length: **11.25**  
Repair Kit P/N: **RSN**

