

[View this product on Kimray.com](#)

MDE

3 FMVT 300RF PB 3 IV

Metering Valve

Piston Balanced

3" 300 RF Through Body

3" Equal Percentage Trim

Process Fluid: **Liquid and Gas**

Operation: **Manual**




Critical Flow Factor (Cf) = 0.75

100% Cv = **107.00**

Cv @ % Stem Travel (%open)									
10%	20%	30%	40%	50%	60%	70%	80%	90%	100%
4	6	10	13	16	26	54	83	97	107

Flow Coefficient (CV) at Stem Travel (% Open) for Item: MDE

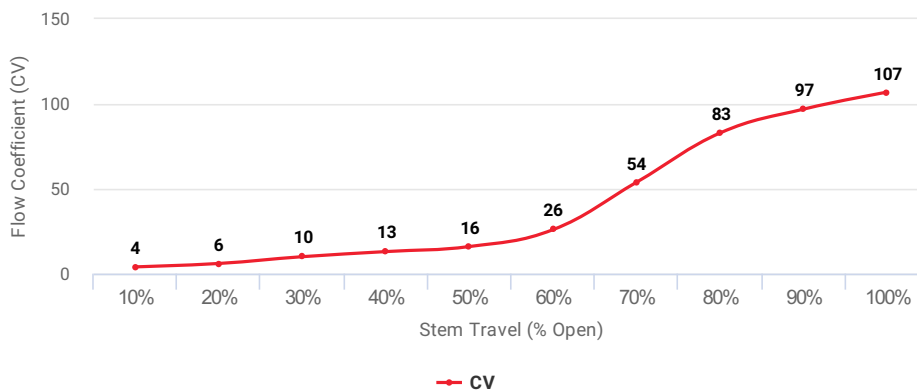

Can be used to meter or control flow of liquids and/or gases on meter runs or flow lines. It can be used as a choke under low pressure drop conditions where freezing is not a problem. Used any time a reference control point is required in 64ths of an inch opening.

Specifications

Connection Size: **3 "**

Connection Type: **300 RF**

Body Style: **Through Body**

Body Material: **Steel**

Option Available for NACE MR0175 compliance or certification.

Trim Size: **3 "**

Trim Type: **Equal Percentage**

Seal Class: **Class VI**

Process Fluid: **Liquid and Gas**

Max. Working Pressure: **740 psig**

Operation: **Manual**

Catalog Page: **E1:55.3**

Face-to-Face Length: **12.5**

Repair Kit P/N: **RSO**

