

APPLICATIONS:

Used to produce a pneumatic output signal when the monitored pressure falls below the set pressure.

Used in conjunction with Kimray MT series valve for regulation of pressure where the pressure to the valve varies more than 2:1 and regulated pressure must be kept to less than 2 psig change.

OPERATION:


The 30 PG PRB Pilot can be considered to be an indirect multiplier. Each 1 psig change in Controlled Pressure results in a change in Output pressure of 8 psig.

SUPPLY PRESSURE:

10 to 300 psig when used with MT series valve.

PRESSURE RANGE:


10 psig to 300 psig

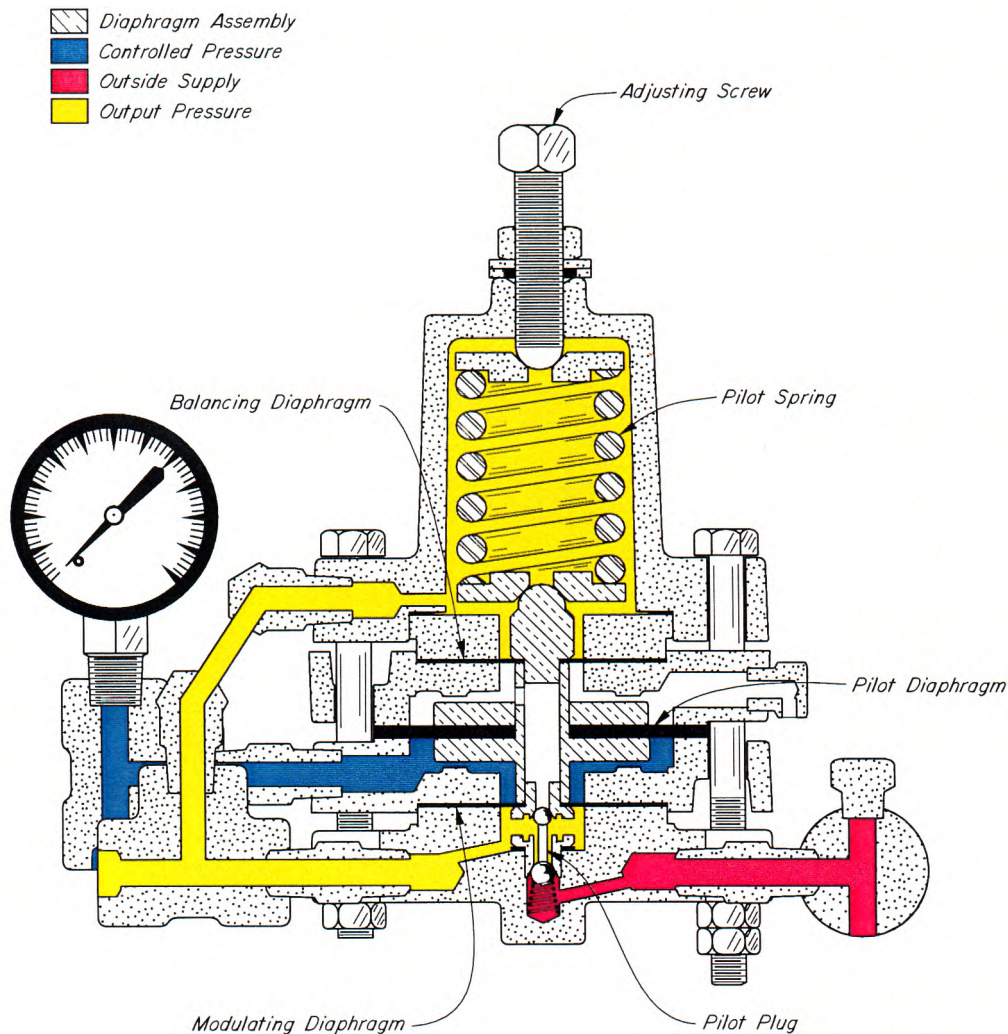

Kimray is an ISO 9001- certified manufacturer.

PILOTS AND ACCESSORIES

PRESSURE REDUCING - BALANCED
DUCTILE IRON & STEEL

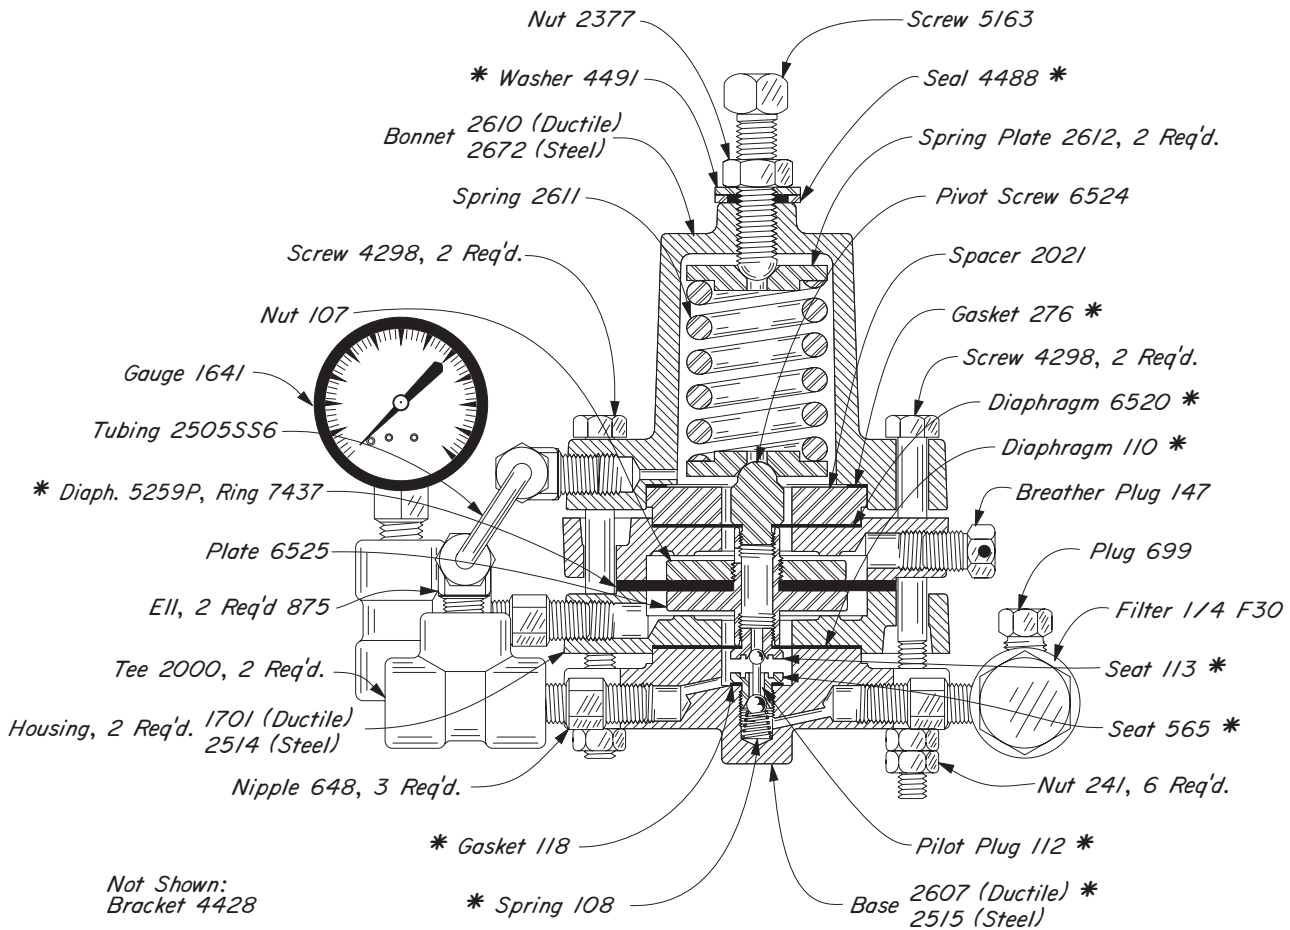

PILOTS AVAILABLE:

CAT. NO.	PILOT	OPER. PRES.	MAX W.P.	KIT
AHM	30 PG PRB-D	280	300	RST
AHN	30 PG PRB-S	280	300	

NOTES:

All openings are tapped 1/4" npt
 *These parts are recommended spare parts and are stocked as repair kits.

Kimray is an ISO 9001- certified manufacturer.