

DESCRIPTION

The B3000 Series flow monitor is a flexible, durable, easy-to-use platform for your flow metering applications. Our trusted flow metering technology now offers a new flow monitor with more options and features than ever before with the B3000 Series.

OPERATION

This monitor is capable of accepting low-level frequency input signals typically found in turbine flow sensors. The output signal for these type of sensors is a frequency proportional to the rate of flow. The B3000 monitor uses the frequency information to calculate flow rate and total flow. Through the use of the programming buttons, you can select rate units, total units and unit time intervals among other functions. If required, the flow monitor can easily be reconfigured in the field. Finally, you can choose between simultaneously showing rate and total, or alternating between rate and grand total.

The monitor is available in three levels of functionality and two packaging options. The base model provides all the functions necessary for the most common flow metering applications. The advanced version adds communications capabilities over an RS485 bus using Modbus RTU and control outputs. The third version is a solar-powered model (NEMA 4X only).

Packaging options include a polycarbonate, NEMA 4X version and an aluminum explosion proof enclosure.

APPLICATIONS

The B3000 monitor is suitable for application in a wide variety of metering needs. A few of the more common industries are:

- Secondary oil recovery applications
- Remediation and reclamation
- Fracture/refracture
- Coal bed methane
- Regulatory compliance and environmental accountability
- Industrial chemicals
- Aggressive chemical processing applications
- Semiconductor manufacturing
- Fertilizer production and dispensing
- Pesticide manufacture
- Liquid batching and water cooling



FEATURES

- Robust alarm parameters provide faster warning when something changes in the process or pipeline.
- Greater control and greater visibility of batch operations.
- Advanced connectivity options allow you to connect meters to your network for remote monitoring and process automation capabilities.
- Solar, battery, and 4...20 milliamperes loop power options provide the ability to install in a remote location and be up and running immediately, maintain readings and settings during power loss, and a battery life up to 6 years.
- Updated display and totalization options provide more flow information, including simultaneous display of rate and total as well as standard, batch and grand totals.
- Various mounting and enclosure options provide a B3000 model for your operation.

PART NUMBER CONSTRUCTION

Blancett B3000 Display

			-		-	
Model						
Blancett B3000 Display	B30					
Model						
Base	B					
Advanced	A					
Solar	S					
Mounting						
Meter		M				
Remote		R				
Swivel		S				
Units of Measure						
Customer Selectable				CS		
For European Units Only						E

Blancett B3000 Explosion-proof Display

			-		-	
Model						
Blancett B3000 Explosion-proof Display	B30					
Model						
Base, Explosion-proof*, Battery & Loop Power	X					
Advanced, Explosion-proof*, Battery & Loop Power	Z					
Mounting						
Remote		R				
Units of Measure						
Customer Selectable				CS		
For European Units Only						E

*For hazardous locations, the monitor has to be installed on an explosion-proof rated meter.

Blancett monitors and meters should be assembled by the customer for each specific application. Since it is not possible for Badger Meter to know where or how these products will be installed, it is the customer's responsibility to select the proper components to meet their application. The customer is responsible for adhering to all applicable codes where the product(s) are installed. Certified components must be installed in the Hazardous location application, using a certified installer to meet all applicable codes. These codes could be the National Electric Code, Canadian Electric Code, any and all local, state, and other codes that are applicable. The local electrical inspector should be consulted for specific questions regarding compliant installations.

SPECIFICATIONS (PAGE 1 OF 2)

Display	Common	Simultaneously shows Rate and Total 5 x 7 Dot Matrix LCD, STN Fluid	
	B30A/B/S	6 Digit Rate, 0.5 inch (12.7 mm) numeric	
		7 Digit Total, 0.5 inch (12.7 mm) numeric	
		Engineering Unit Labels 0.34 inch (8.6 mm)	
	B30X/Z	6 Digit Rate, 0.37 inch (9.4 mm) numeric	
		7 Digit Total, 0.37 inch (13 mm) numeric	
		Engineering Unit Labels 0.24 inch (6.1 mm)	
Power	Annunciators	Alarm 1 (A), Alarm 2 (A), Battery Level (A), RS485 Communications (COM)	
	B30A/B/X/Z	Auto switching between internal battery and external loop power; B30A/Z includes isolation between loop power and other I/O	
		Battery	3.6V DC lithium D Cell gives up to 6 years of service life
		Loop	4...20 mA, two wire, 25 mA limit, reverse polarity protected, 7V DC loop loss
	B30S	Internal battery (3.6V DC Nicd) provides up to 30 days of power after 6...8 hours exposure of the integrated photovoltaic cell to direct sunlight	
Inputs	Magnetic Pickup	Frequency Range	1...3500 Hz
		Frequency Measurement Accuracy	±0.1%
		Over Voltage Protection	28V DC
		Trigger Sensitivity	30 mV _{p-p} (High) or 60 mV _{p-p} (Low) - (selected by circuit board jumper)
	Amplified Pulse	Direct connection to amplified signal (pre-amp output from sensor)	
Outputs	Analog 4...20 mA	4...20 mA, two-wire current loop. 25 mA current limit	
	Totalizing Pulse	One pulse for each Least Significant Digit (LSD) increment of the totalizer	
		Pulse Type (selected by circuit board jumper)	Opto-isolated (Iso) open collector transistor
			Non-isolated open drain FET
		Maximum Voltage	28V DC
		Maximum Current Capacity	100 mA
		Maximum Output Frequency	16 Hz
		Pulse Width	30 mSec fixed
	Status Alarms B30A/Z	Type	Open collector transistor Adjustable flow rate with programmable dead band and phase.
		Maximum Voltage	28V DC
		Maximum Current	100 mA
		Pullup Resistor	External required (2.2 k Ohm minimum, 10 k Ohm maximum)
	Status Alarms B30B/S/X	None	
Modbus Digital Communications	B30A/Z	Modbus RTU over RS485, 127 addressable units / 2-wire network, 9600 baud, long integer and single precision IEEE754 formats; retrieve: flow rate, job totalizer, grand totalizer, alarm status and battery level; write: reset job totalizer, reset grand totalizer	
	B30B/S/X	None	
Data Configuration and Protection	B30A/B/X/Z	Two four-digit user selectable passwords; level one password enables job total reset only, level two password enables all configuration and totalizer reset functions Not applicable on solar powered units.	

SPECIFICATIONS (PAGE 2 OF 2)

Certifications	Safety	B30A/B/S	Class I Division 1, Groups C, D; Class II, Division 1 Groups E, F, G; Class III for US and Canada. Complies with UL 913 and CSA C22.2 No. 157-92			
		B30X/Z	Class I Division 1 Groups B, C, D; Class II, Division 1, Groups E, F, G; Class III for US and Canada Complies with UL 1203 and CSA C22.2 No. 30-M1986			
			ATEX II 2 G Ex db IIC T4 Gb and ATEX II D Ex tb IIIC T135 °C Db			
			Complies with Directive 2014/34/EU and S.I. 2016/1107			
	Entity Parameters	B30A/B only	4...20 mA Loop: Vmax = 28V DC	I _{max} = 26 mA	Ci = 0.5 µF	Li = 0 mH
		B30A/B/S only	Pulse Output: Vmax = 28V DC	I _{max} = 100 mA	Ci = 0 µF	Li = 0 mH
		B30A/B/S only	Reset Input: Vmax = 5V DC	I _{max} = 5 mA	Ci = 0 µF	Li = 0 mH
		B30A only	RS485: Vmax = 10V DC	I _{max} = 60 mA	Ci = 0 µF	Li = 0 mH
		B30A/B/S only	Turbine Input: Voc = 2.5V	I _{sc} = 1.8 mA	Ca = 1.5 µF	La = 1.65 H
	EMC	2004/108/EC and S.I. 2016/1091				
Measurement Accuracy	Common Accuracy	0.05%				
Response Time (Damping)	Common Response Time	1...100 seconds response to a step change input, user adjustable				
Environmental Ratings	Pollution Degree	2				
	Use	Indoor/Outdoor				
	Ambient Temperature	-22...158° F (-30...70° C)				
	Humidity	0...90%, non-condensing				
	Altitude Restriction	2000 m (6561 ft)				
Materials and Enclosure Ratings	B30A/B/S	Polycarbonate, stainless steel, polyurethane, thermoplastic elastomer, acrylic; NEMA 4X/IP 66				
	B30X/Z	Copper free, epoxy-coated, aluminum, buna seal, NEMA 4X/IP66				
Engineering Units	Liquid	US Gallons, Liters, Oil Barrels (42 US gallons), Liquid Barrels (31.5 US gallons), Cubic Meters, Million US Gallons, Cubic Feet, Million Liters, Acre Feet				
	Gas	Cubic Feet, Thousand Cubic Feet, Million Cubic Feet, Standard Cubic Feet, Actual Cubic Feet, Normal Cubic Meters, Actual Cubic Meters, Liters				
	Rate Time	Seconds, minutes, hours, days				
	Totalizer Exponents	0.00, 0.0, x1, x10, x100, x1000				
	K factor Units	Pulses/US gallon, pulses/cubic meter, pulses/liter, pulses/cubic foot				

MOUNTING STYLES

Meter Mount

- Monitor is assembled to the flow meter, creating a compact flow measurement system.
- NEMA 4X (IP 66) enclosure.




Remote Mount

- Ideal when monitor needs to be located away from flow meter. Suitable for high temperature, excessive noise or inaccessible areas.
- NEMA 4X (IP 66) enclosure.
- Panel, DIN rail, and pipe mounting hardware included.
- Cable lengths from 10...100 ft (3...30.5 m) sold separately.



Swivel Mount

- Capable of adjustment pivot of 180 degrees for ease of viewing.
- NEMA 4X (IP 66) enclosure.
- Remote Swivel mount also available, consult factory for details.
- Offers additional protection from elements.

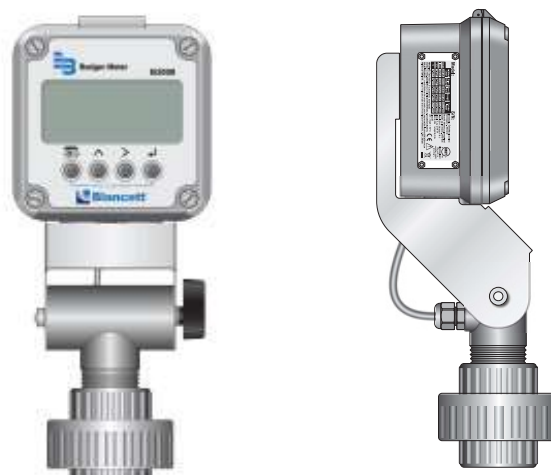

Explosion Proof

- Ideal for hazardous locations.
- NEMA 4X (IP 66) enclosure.
- Rugged compact design.
- Remote or meter mount.




DIMENSIONS

Meter Mount




A	B	C
4.50 in. (114.3 mm)	5.08 in. (129.0 mm)	4.78 in. (121.4 mm)

Remote Mount

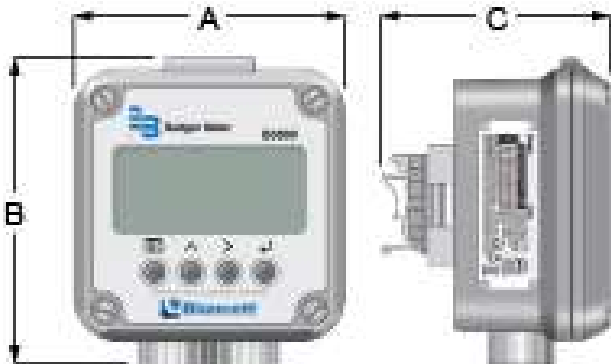


A	B	C
4.50 in. (114.3 mm)	5.08 in. (129.0 mm)	3.80 in. (96.5 mm)

Explosion Proof

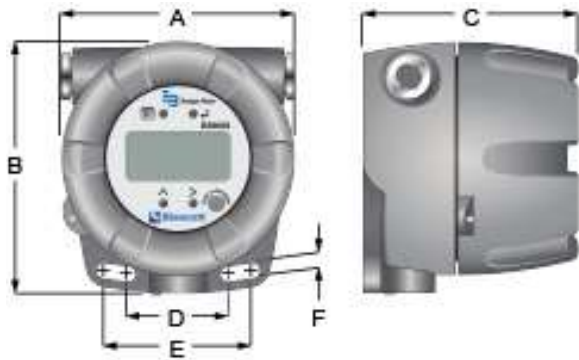

A	B	C	D	E	F
5.25 in. (133.4 mm)	5.65 in. (143.5 mm)	4.86 in. (123.4 mm)	2.25 in. (57.1 mm)	3.35 in. (85.1 mm)	0.33 in. (8.4 mm)

Swivel Mount

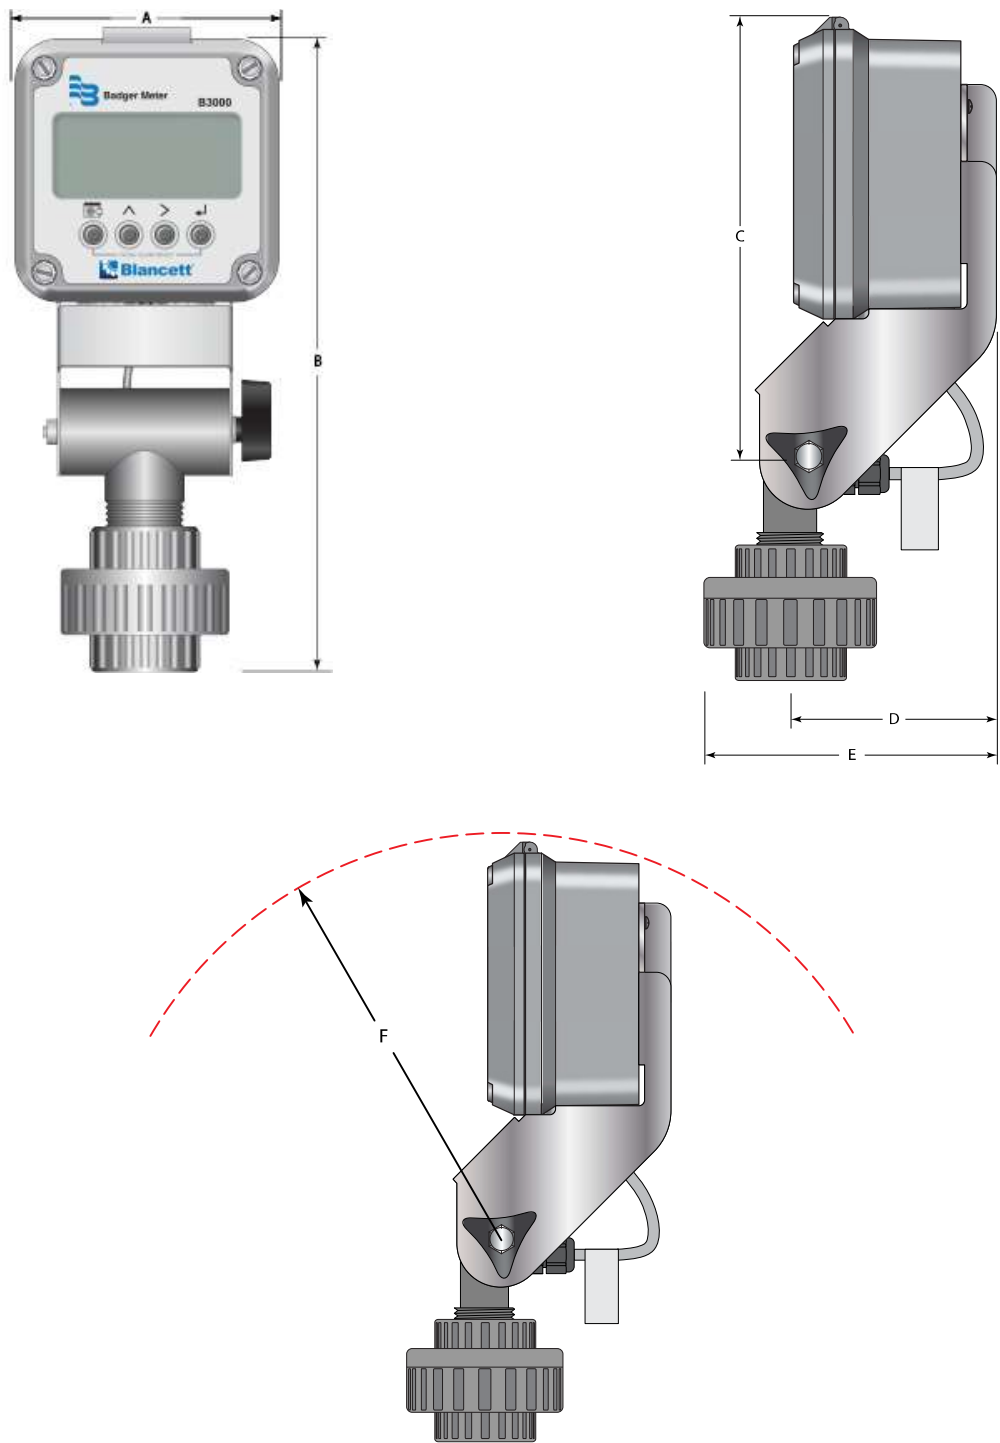


A	B	C	D	E	F
4.50 in. (114.3 mm)	10.9 in. (276.9 mm)	6.90 in. (175.4 mm)	3.21 in. (81.5 mm)	4.25 in. (107.9 mm)	7.00 in. (177.8 mm)

ACCESSORIES

Part Number	Description
B280-737	Explosion-proof Meter Mount Kit, 1 in. connections
B280-742	Explosion-proof Meter Mount Kit, 1/2 in. connections

Meter Mounting Kits

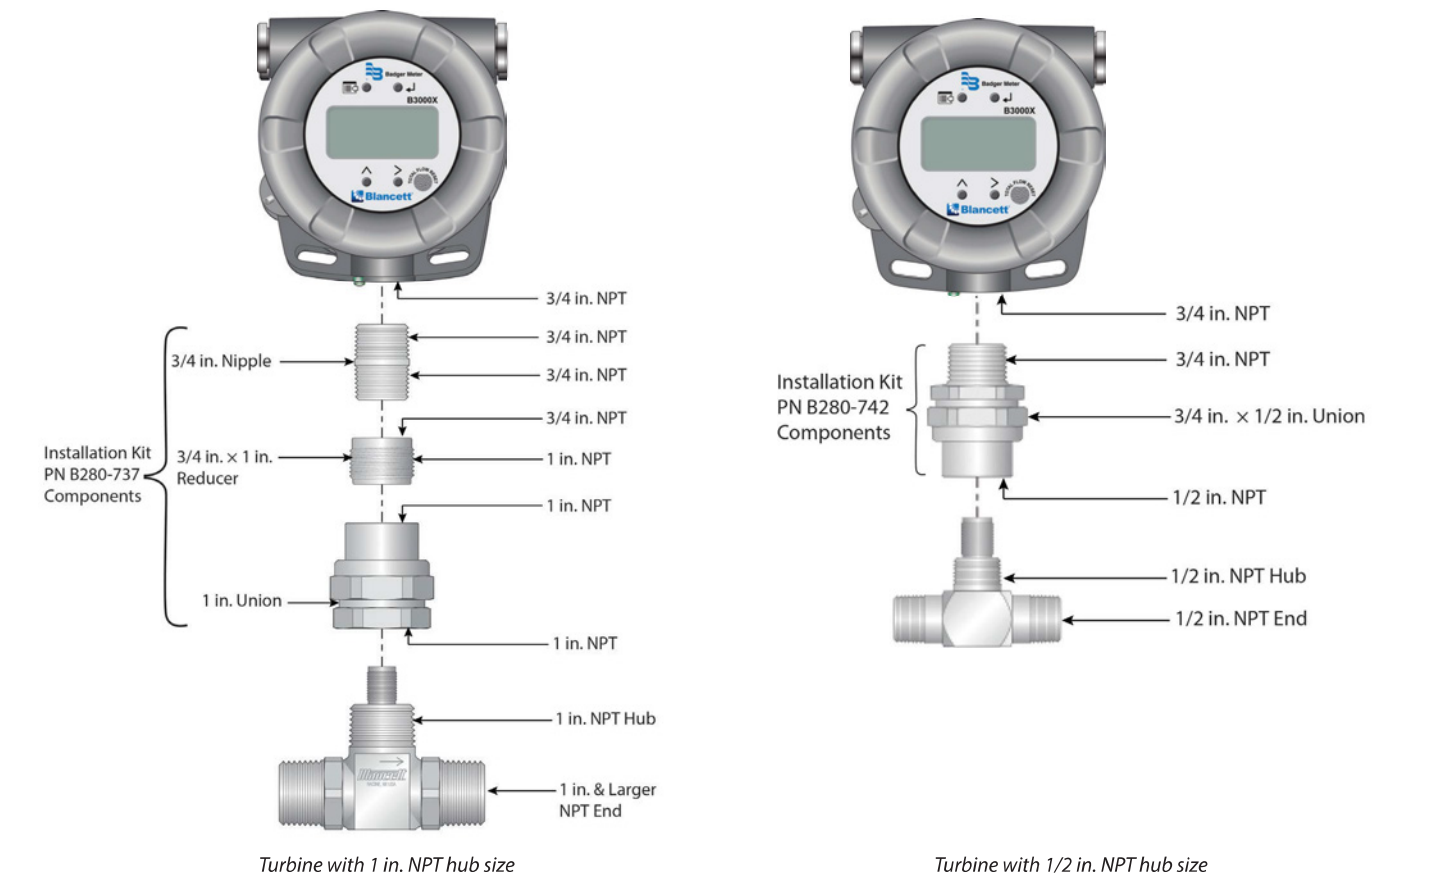

Blancett monitors and meters should be assembled by the customer for each specific application. Since it is not possible for Badger Meter to know where or how these products will be installed, it is the customer's responsibility to select the proper components to meet their application. The customer is responsible for adhering to all applicable codes where the product(s) are installed. Certified components must be installed in the Hazardous location application, using a certified installer to meet all applicable codes. These codes could be the National Electric Code, Canadian Electric Code, any and all local, state, and other codes that are applicable. The local electrical inspector should be consulted for specific questions regarding compliant installations.

Control. Manage. Optimize.

Blancett is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2024 Badger Meter, Inc. All rights reserved.