


APPLICATIONS:

Increases working pressure of Thermostat Sensing Element.
All Separable Sockets are filled with high temperature grease.
Allows Thermostat removal without losing vessel pressure.

FEATURES:

One-piece construction

CERTIFICATIONS:

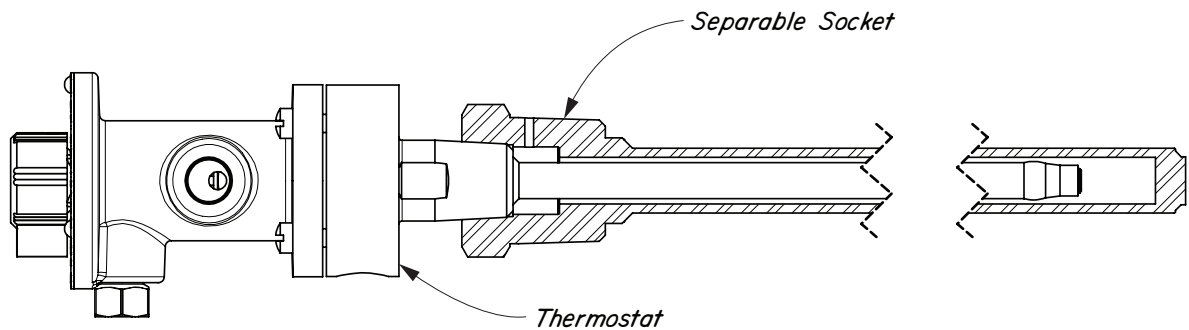

CODE	Thread Size MNPT	Description	Material	Length inches	Max. W.P. psig	Max. W.P. kg/cm ²
HCB	1"	SS-6	STL	6	4,000	281.23
HCC	1"	SS-12	STL	12	4,000	281.23
HCE	1"	SS-12SS	SS6	12	4,000	281.23
HCH	3/4"	3/4SS-12	STL	12	4,000	281.23
HCJ	3/4"	3/4SS-12SS	SS6	12	4,000	281.23
HCM	3/4"	3/4SS-6	STL	6	4,000	281.23
HCMSS6	3/4"	3/4SS-6SS	SS6	6	4,000	281.23
HCN	1"	SS-6SS	SS6	6	4,000	281.23

TEMPERATURE CONTROLLERS



CODE BUILDER T SERIES

Series:

T = Temperature Controllers

Model:

12 = -30°F to 400°F Thermostat
HT = -30°F to 750°F Thermostat
PG = Pilot Guard
SD = Shut Down with Manual Reset

Service Type:

S = Standard

T	12	S	
---	----	---	--

Options: Additional cost and lead times will apply
If multiple options required input in sequential order
Leave blank if no options required

V = FKM Elastomers

Not all selections available on all products listed.
See product pages 07:10.1 - 07:40.2 for available options