

#### APPLICATIONS:


- Shut-in relay
- Remote shut-in relay
- Signal priority sensor
- Automatic shut-down relay
- Signal interruption

#### FEATURES:

- Max. Body design pressure - 300 psig

#### CERTIFICATIONS:

Kimray is an ISO 9001- certified manufacturer.

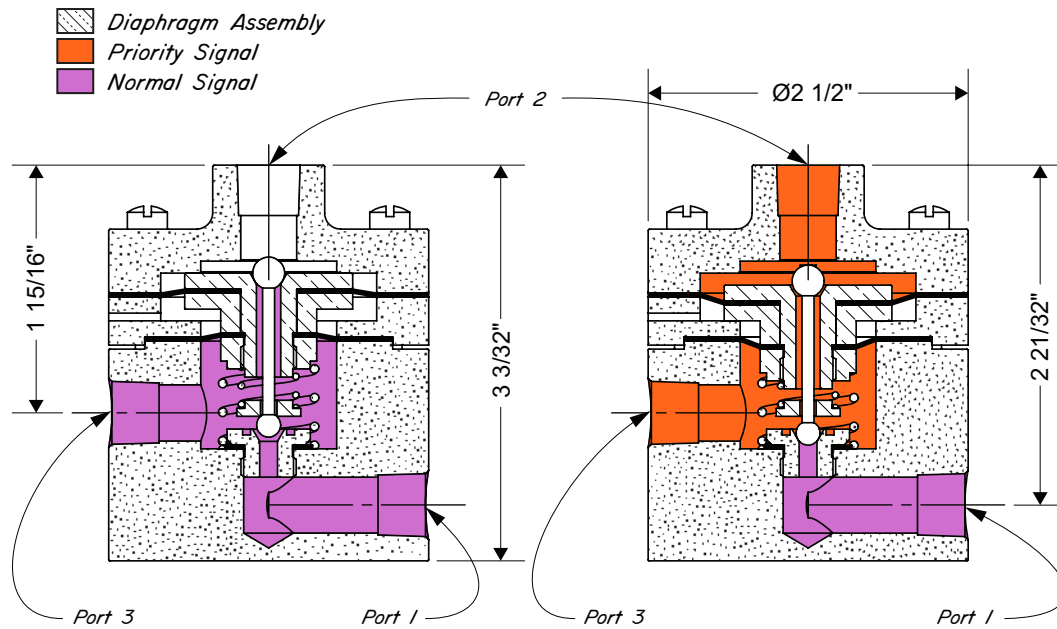

Order Code	Connection Type	Operating Temperature	Output Press psig	Max. W.P. psig †
YBA	1/4" FNPT	150°F (66°C)	40	40


#### NOTES:

† Max W.P. values based on -20°F to 100°F.

Pressure required at port 2 to override the pressure at port 1 20 psig or 70% of the pressure at Port 1 (whichever is greater).

# ACCESSORIES

## PRIORITY SIGNAL RELAY DRAWING & PARTS LIST

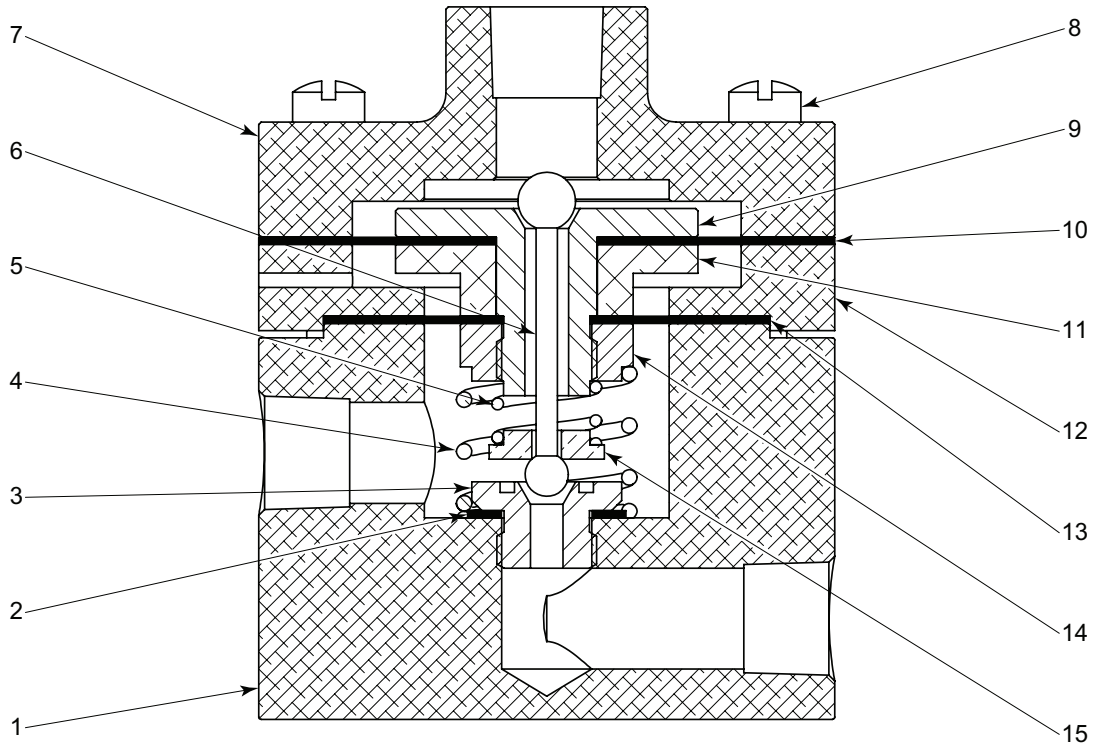

ITEM	QTY.	DESCRIPTION	PART NO	ITEM	QTY.	DESCRIPTION	PART NO
1	1	Body	2228	9	1	Upper Diaphragm Plate	2223
2	1	Gasket	118	10	1	Diaphragm	2224
3	1	Seat	113	11	1	Lower Diaphragm Plate	2217
4	1	Spring	2227	12	1	Housing	2218
5	1	Spring	2226	13	1	Diaphragm	2225
6	1	Pilot Plug	2220	14	1	Nut	2219
7	1	Bonnet	2215	15	1	Keeper	2221
8	6	Screw	2216				

All Pictures shown are for illustration purpose only. Actual product may vary due to product enhancement.