

APPLICATION:

Used as oil or water dump valves on separators, treaters, knockouts, and other similar liquid accumulators.

FEATURES:

- Balanced, single soft seat
- Teflon packed, rotary stuffing box
- All internal parts easily be removed with valve in line

CERTIFICATIONS:

- Canadian Registration Number (CRN):
- 0C16234.24567890NTY (Ductile)
- 0C15610.24567890NTY (Steel)

Kimray is an ISO 9001- certified manufacturer

TEMPERATURE:

Delrin Cages should only be used up to 180°F (82°C) max


OPERATION:

The Oil Valve is mechanically operated through a LEVER by a Float in a separator or other vessel to which the valve is connected. The STEM AND SEAT ASSEMBLY is driven through a crank by the LEVER. The area of the DIAPHRAGM is the same as the area of the SEAT so that Separator Fluid Pressure (Green) acting down on the SEAT is cancelled by the upward force of the pressure on the DIAPHRAGM. Downstream Pressure (Blue) is communicated through the hollow STEM to the top side of the DIAPHRAGM. Downstream Pressure (Blue) acting up on the SEAT is cancelled by the downward force of the same pressure on the top side of the DIAPHRAGM. The valve can be operated easily by float since it is unaffected by Separator Fluid Pressure (Green) or Downstream Pressure (Blue). The entire STEM AND SEAT ASSEMBLY with the CAGE can be withdrawn from the valve as a unit by removing the BONNET screws.


NOTE:

The Customer is responsible for specifying linkage arm lengths and proper installation of float trunnions, valves and linkage assemblies. The total resulting force generated by the float is a function of the size and density of the float, the specific gravity of the fluid, the lever arm positions and angles and proper installation of the equipment. These criteria at least should be considered when specifying and installing linkage assemblies between vessels and valves.

- Stem and Seat Assembly
- Separator Fluid pressure
- Downstream Pressure

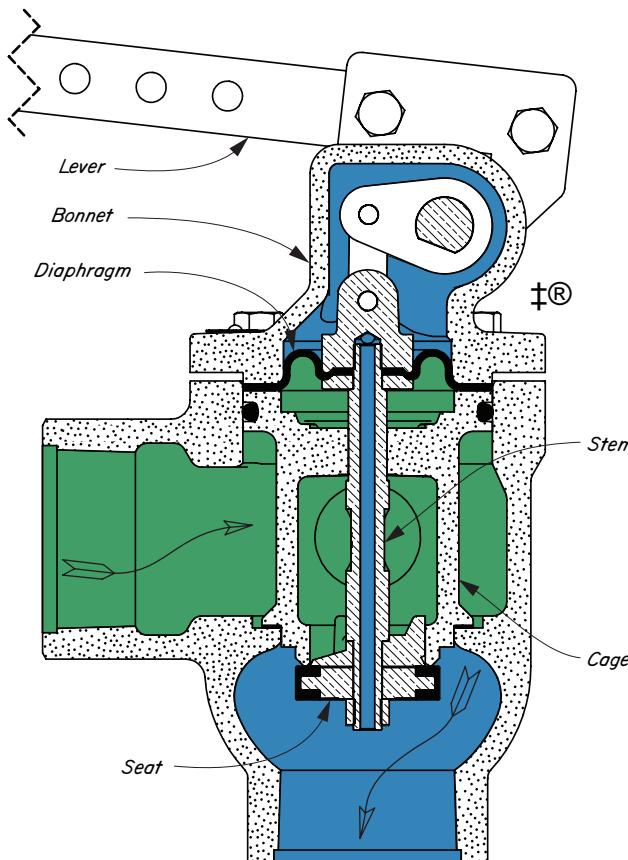

**DIAPHRAGM BALANCED LEVER OPERATED
STEEL**

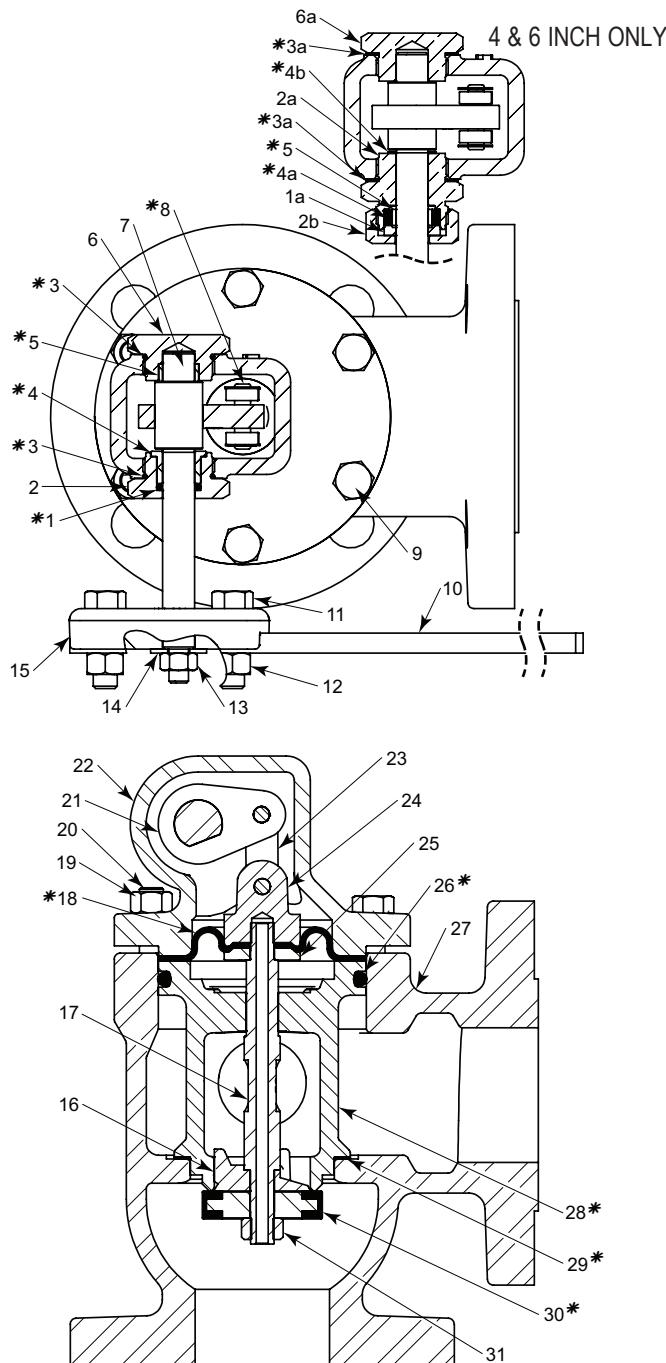

ITEM	QTY.	DESCRIPTION	PART NO.			
			2 INCH	3 INCH	4 INCH	6 INCH
1	1	O RING	*	154HSNPS	491HSNPS	-----
1a	1	FOLLOWER	-----	-----	350	1785
2	1	STUFFING BOX	7661	7593	-----	-----
2a	1	STUFFING BOX	-----	-----	359	1779
2b	1	STUFFING BOX NUT	-----	-----	347	1778
3	2	O RING	*	2131HSN	5226HSN	-----
3a	2	GASKET	*	-----	366	1789
4	1	BUSHING	*	7660	7592	-----
4a	QTY	PACKING RING	*	-----	353 x 1	1787 X 2
4b	1	THRUST WASHER	*	-----	362	1788
5	1	PACKING	*	7662	355	356
6	1	TRUNNION PLUG	7522	7523	-----	-----
6a	1	TRUNNION PLUG	-----	-----	369	1777
7	1	SHAFT	7404	7408	7427	7449
8	2	LINK PIN w/ SNAP RINGS	*	316SS6	317SS6	1790SS6
		(kit includes Snap Rings only)				
9		BOLT	1672 x 4	1672 x 6	1672 x 8	81 x 8
10	1	LEVER	-----	-----	340	-----
11	2	BOLT	-----	-----	247	-----
12	2	NUT	-----	-----	241	-----
13	1	NUT	7366	7411	7486	-----
14	1	WASHER	4492	7544	4491	-----
15	1	LEVER HUB	7600	7601	7602	7603
	1	SET SCREW (NOT SHOWN)	-----	-----	7608	-----
16	1	RATIO PLUG	332DEL	333DEL	334	2348
17	1	STEM	326	327	328	2350
18	1	DIAPHRAGM	*	335	336	4700
19	2	NUT	5109	-----	-----	-----
20	2	STUD	5108	-----	-----	-----
21	1	TRUNNION HUB	7403	7407	7454	7453
22	1	BONNET	7164S	4032	1716	3074
23	2	LINK	318SS6	319SS6	2352SS6	-----
24	1	NUT	2972	321	322	2346
25	1	PLATE	323SS6	324SS6	325SS6	2347
26	1	O-RING	*	329HSN	330HSN	331
	1	BODY	-----	-----	-----	-----
27	1	FLANGED ANGLE	4349	2471	2472	3073
		FLANGED THRU	3092	-----	-----	-----
28	1	CAGE ‡	304DEL	305DEL	306	2345
29	1	GASKET	*	276	277	309
	1	SEAT	*	7498HSN	7499HSN	-----
30	1	SEAT	*	-----	165	2356
		SEAT DISC	-----	-----	160	2349
31	1	LOCK NUT	*	173	906	175
	2	LIFTING RINGS (not shown)	-----	7559	-----	-----

‡ Delrin Cage available on request for 4 inch valves

VALVES AVAILABLE:

PART NO.	BODY CONNECTION	BODY TYPE	MODEL NO.	OPER. PRES.	MAX W.P.	REP. KIT
CBM	2" 150RF	ANGLE	225 FOA-S	10-250	285	RTJ
CBP	3" 150RF	ANGLE	312 FOA-S	10-125	285	RTK
CBQ	4" 150RF	ANGLE	412 FOA-S	10-125	285	RTL
CBR	6" 150RF	ANGLE	612 FOA-S	10-125	285	RTM
CHM	2" 150RF	THRU	225 FOT-S	10-250	285	RTJ


NOTE: This valve contains Ductile & Cast Iron wetted parts & Brass Packing Material.

NOTES:

*These parts are recommended spare parts and are stocked as repair kits.

For standard & optional Seals, Metals, Cv values, Material specifications & Dimensions see Technical Data on pages C2:I - C2:V

† Max W.P. values based on -20°F to 100°F. See page C2:V for temps above 100°F

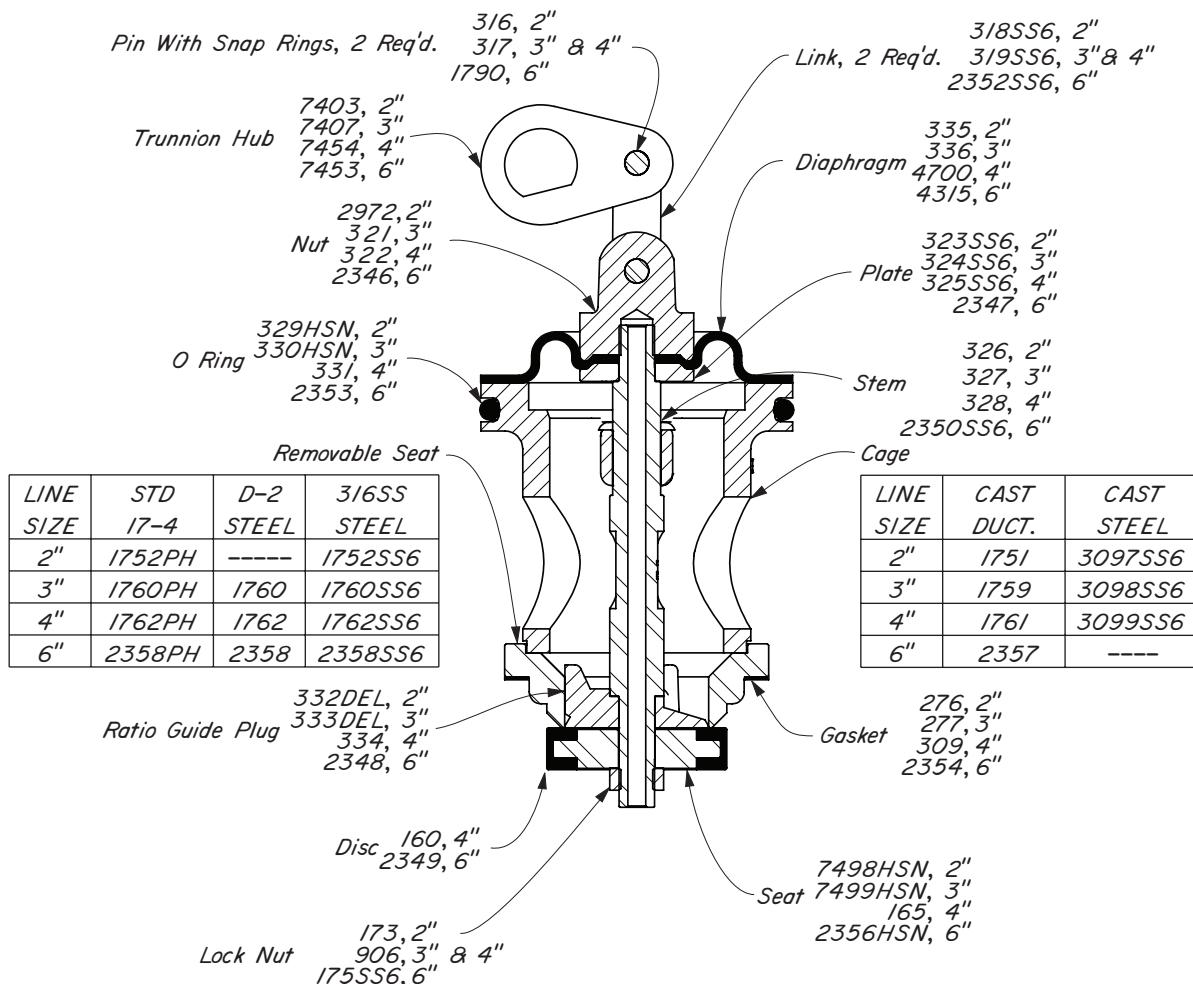

ASSEMBLIES AVAILABLE:

PART NO.	LINE SIZE	VALVE TYPE	VALVE DESCRIPTION
CBS1	2"	DIAPHRAGM BALANCED	212 S/FOA
CBT1	3"	DIAPHRAGM BALANCED	312 S/FOA
CBU1	4"	DIAPHRAGM BALANCED	412 S/FOA
CBZ1	6"	DIAPHRAGM BALANCED	612 FOA

NOTES:

The numbers of a series assigned to a part indicate different line sizes. For example: Shaft 370-2", 371-3", 372-4".

For standard & optional Seals, Metals, Cv values, Material specifications & Dimensions see Technical Data on pages C2:I - C2:V

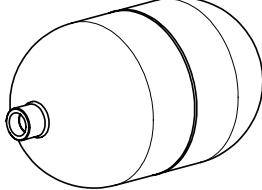
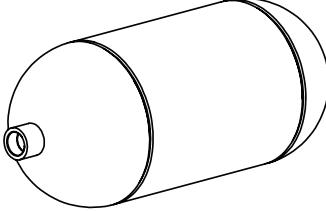
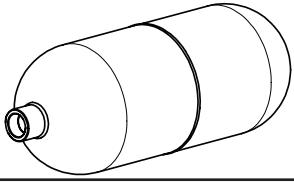

Floats for Trunnion Assemblies						
	Part Number	Size	Material	Weight (oz)	Displacement in Water (oz)	Max. Working Pressure
	4009S4	7in. x 12 in.	304SS	100	214.9	600
	4009S6	7in. x 12 in.	316SS	100	214.9	600
	7143S4	7in. x 16 in.	304SS	100	305.6	275
	5581S4	5 1/2in x 14in.	304SS	63	166	350
	5581S6	5 1/2in x 14in.	316SS	63	166	350
	2822S4	7 3/4in.	304SS	53	141	250
Float Arms for Trunnion Assemblies						
	4041	12 in.	All float arms are made of 3/4" NPT Schedule 40 ASTM A53.			
	4041L14	14 in.				
	4041L16	16 in.				
	4041L18	18 in.				
	4041L24	24 in.				
	4041L31	31 in.				



Table 1 - Flow Coefficient(Cv) for Mechanical Level Controls										
2" Mechanical Level Control Diaphragm & Piston Balanced										
Trim Size in. (mm)	C _f	Valve Opening Percentage								
1 1/2 in (38mm)	0.79	10	20	30	40	50	60	70	80	90
		5.0	8.5	11.7	14.6	17.0	19.0	20.5	21.6	22.6
										23.3
3" Mechanical Level Control Diaphragm & Piston Balanced										
Trim Size in. (mm)	C _f	Valve Opening Percentage								
2 1/4 in (57 mm)	0.79	10	20	30	40	50	60	70	80	90
		6.7	11.1	15.6	20.3	24.8	29.2	33.4	37.2	40.7
										43.8
4" Mechanical Level Control Diaphragm & Piston Balanced										
Trim Size in. (mm)	C _f	Valve Opening Percentage								
3 in (76 mm)	0.79	10	20	30	40	50	60	70	80	90
		12.0	18.9	25.8	32.8	39.9	46.9	53.7	60.0	65.7
										70.1
6" Mechanical Level Control Diaphragm Balanced										
Trim Size in. (mm)	C _f	Valve Opening Percentage								
4.88 in (124 mm)	0.79	10	20	30	40	50	60	70	80	90
		14.2	21.0	31.6	61.2	98.3	139.0	179.7	217.6	250.2
										277.0
2" Mechanical Level Control Severe Service										
Trim Size in. (mm)	C _f	Valve Opening Percentage								
1 1/2 in (38mm) Reduced	0.75	10	20	30	40	50	60	70	80	90
		3.5	5.0	7.4	9.6	11.8	13.9	16.2	18.4	20.4
2 in (51 mm) Full Port	0.75	100	6.6	12.3	18.4	24.2	29.5	34.1	38.0	41.2
										47.0
3" Mechanical Level Control Severe Service										
Trim Size in. (mm)	C _f	Valve Opening Percentage								
3 in (76 mm)	0.75	10	20	30	40	50	60	70	80	90
		12.7	18.7	29.0	41.0	52.9	63.4	71.9	78.4	83.7
										89.0

Kimray flow equations conform to ANSI/ISA - 75.01.01-2002


Kimray inherent flow characteristics conform to ANSI/ISA 75.11.01 -1985

LEVER OPERATED LIQUID LEVEL CONTROLS

KIMRAY
INC.®

DIMENSIONS

DIAPHRAGM & PISTON BALANCED

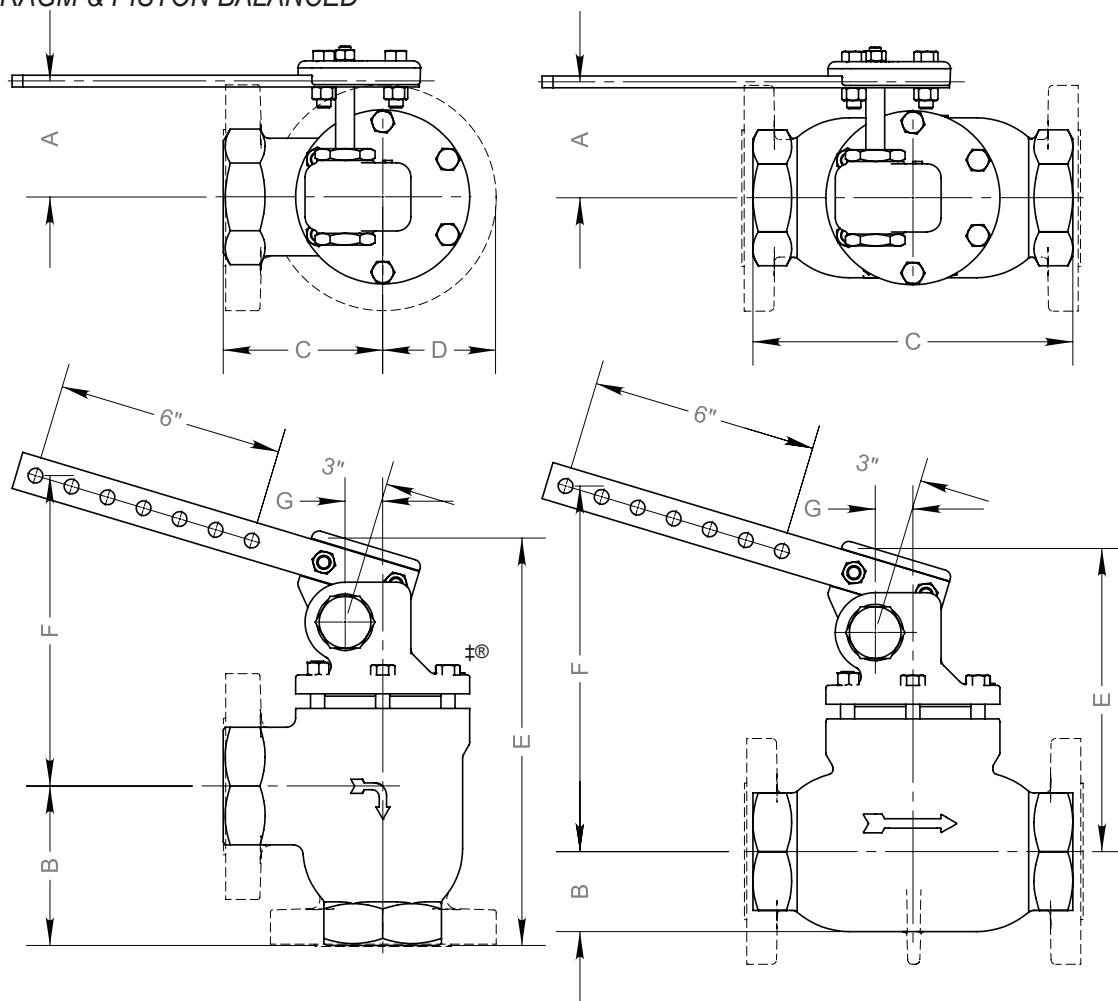

LINE SIZE	MATERIAL	BODY TYPE & END CONNECTION	A	B	C	D	E	F	G
2 in	DUCTILE	NPT / ANGLE	3 3/4 in	4 1/4 in	4 1/4 in	3 in	10 5/8 in	6 3/4 in	1 in
		NPT / THRU	3 11/16 in	2 1/8 in	8 1/2 in	3 in	7 7/8 in	8 1/4 in	1 in
		FLANGED / ANGLE	3 3/4 in	4 1/4 in	4 1/4 in	3 in	10 5/8 in	6 3/4 in	1 in
		FLANGED / THRU	3 11/16 in	2 1/8 in	9 in	3 in	7 7/8 in	8 1/4 in	1 in
	STEEL	FLANGED / ANGLE	3 3/4 in	4 5/16 in	4 5/16 in	3 in	10 7/8 in	6 3/4 in	1 in
		FLANGED / THRU	3 11/16 in	2 1/8 in	9 1/8 in	3 in	7 7/8 in	8 1/4 in	1 in
3 in	DUCTILE	NPT / ANGLE	3 3/4 in	6 1/8 in	5 1/2 in	3 3/4 in	13 13/16 in	7 1/8 in	1 3/8 in
		NPT / THRU	3 3/4 in	2 7/8 in	12 in	3 3/4 in	9 9/16 in	8 15/16 in	1 3/8 in
		FLANGED / ANGLE	3 3/4 in	5 1/2 in	5 1/2 in	3 3/4 in	13 3/16 in	7 1/8 in	1 3/8 in
		FLANGED / THRU	3 3/4 in	2 7/8 in	12 3/16 in	3 3/4 in	9 9/16 in	8 15/16 in	1 3/8 in
		GROOVED / ANGLE	3 3/4 in	5 1/2 in	5 1/2 in	3 3/4 in	13 13/16 in	7 1/8 in	1 3/8 in
	STEEL	FLANGED / ANGLE	3 3/4 in	5 1/2 in	5 1/2 in	3 3/4 in	13 3/8 in	8 15/16 in	1 3/8 in
4 in	DUCTILE	FLANGED / ANGLE	3 3/4 in	6 1/2 in	6 1/2 in	4 1/2 in	15 in	9 1/4 in	1 3/8 in
		FLANGED / THRU	3 13/16 in	3 11/16 in	15 in	4 1/2 in	10 9/16 in	11 1/2 in	1 3/8 in
	STEEL	FLANGED / ANGLE	3 3/4 in	6 1/2 in	6 1/2 in	4 1/2 in	15 1/16 in	9 1/4 in	1 3/8 in
6 in	DUCTILE	FLANGED / ANGLE	4 1/16 in	10 1/4 in	7 11/16 in	5 1/2 in	21 5/8 in	12 5/8 in	1 5/8 in
		FLANGED / THRU	4 1/16 in	4 7/8 in	22 1/16 in	5 1/2 in	14 7/8 in	16 1/16 in	1 5/8 in
	STEEL	FLANGED / ANGLE	4 1/16 in	10 1/4 in	7 3/4 in	5 1/2 in	21 7/16 in	12 5/8 in	1 5/8 in

FLANGE DIMENSIONS ARE ANSI 125/150 STANDARD.

Table 2 - Seal Options Level Controllers

Part	Standard Material	Optional Material
O-rings	HSN	FKM, AFLAS®
Diaphragm	HSN	FKM, AFLAS®
Bushing	PTFE	N/A

Table 3 - Seal Options Trunnion Assemblies

Part	Standard Material	Optional Material
O-rings	Nitrile	FKM, HSN, AFLAS®

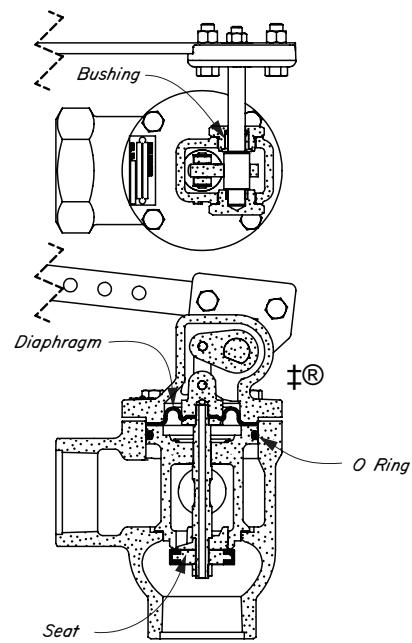
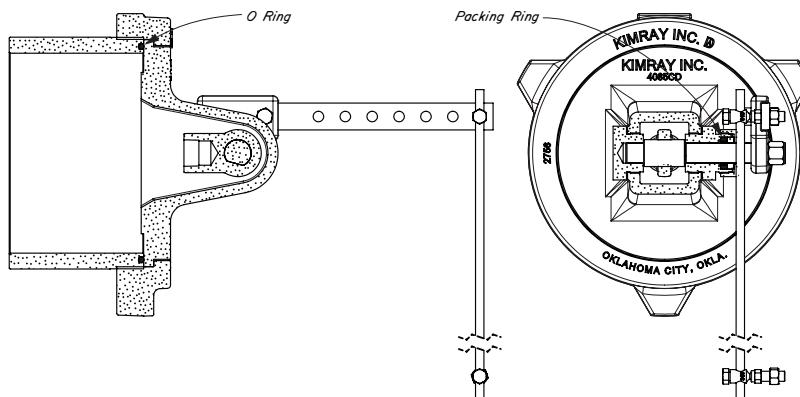


Table 4 - Seal Specifications

	NITRILE	HIGHLY SATURATED NITRILE	FKM	AFLAS®	POLY-URETHANE	GYLON
Kimray Suffix	-	HSN	V	AF	P	GY
Resistance	Abrasion	G	G-E	G	G	E
	Acid	F	G-E	G-E	E	P
	Chemical	F	F	E	E	F
	Cold	G	G	P	P	E
	Flame	P	P	E	E	P
	Heat	G	E	E	F	E
	Oil	G-E	E	E	G	E
	Ozone	P	G	G-E	E	E
	Set	G	G	G-E	P	F
	Tear	F	F	F	P	G-E
	Water/Steam	F	E	P	G	P
	Weather	F	G	E	E	E
	CO₂	F-G	G	G	G	E
Properties	H₂S	P	F	P	E	E
	Methanol	F	E	P	P	E
	Dynamic	G	G	G	E	P
	Electrical	F	F	F	G-E	E
	Impermeability	G	G	G	G	E
	Tensile Strength	G	G-E	G	F	G-E
	Temp. Range (°F)	-20° to +225°F	-20° to +250°F	-15° to +400°F	+15° to +450°F	-40° to +180°F
	Temp. Range (°C)	-29° to +107°C	-29° to +121°C	-26° to +204°C	-9° to +232°C	-40° to +82°C
	Form	O,S,D	O,S,D	O,S,D	O,S,D	S,D
	RATINGS: P-POOR, F-FAIR, G-GOOD, E-EXCELLENT					

LEVER OPERATED LIQUID LEVEL CONTROLS

MATERIAL SPECIFICATION

KIMRAY
INC.®

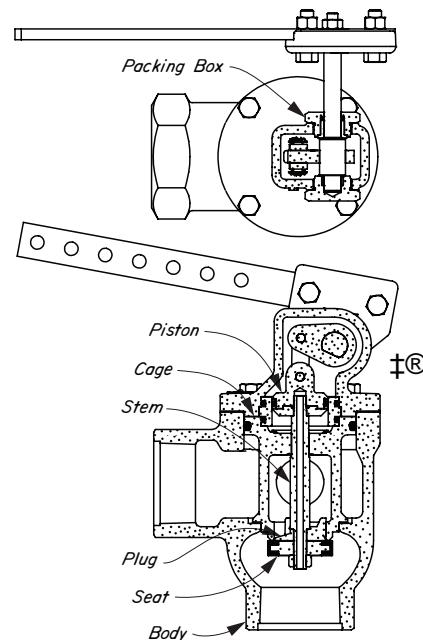


Table 5 - Level Controller Materials of Construction		
Part Description	Standard Material	Optional Material(s)
Body	Ductile Iron, ASTM A-395	ASTM A-216 WCB,
Stem	ASTM A-582 303SS	316S, ASTM A-213
Plug	Delrin	ASTM A-316
Cage	Delrin	ASTM A-316, A-351
Seat	HSN	FKM
Piston	316S, ASTM A-351	
Packing Box	ASTM A-582 303SS	ASTM A-479 316SS

Table 6 - Trunnion Materials of Construction		
Part Description	Standard Material	Optional Material(s)
Bonnet	Ductile Iron	ASTM A216 WCB
Plate	Steel SA - 515 Grade 70 Plate	
Packing Box	Brass with Nitrile/Teflon Packing ASTM B-429	ASTM A-316, ASTM A-479
Shaft	303S, ASTM A-582	ASTM A-316, ASTM A-479
Float Hub	ASTM A-316	ASME SA-351, ASTM A-351
Union Nut	Ductile Iron	ASTM - A395
Weld Neck	8 in. Schedule 100 Pipe ASTM A-106 Grade B	
Lever Hub	Gray Iron, ASTM A-126-B	


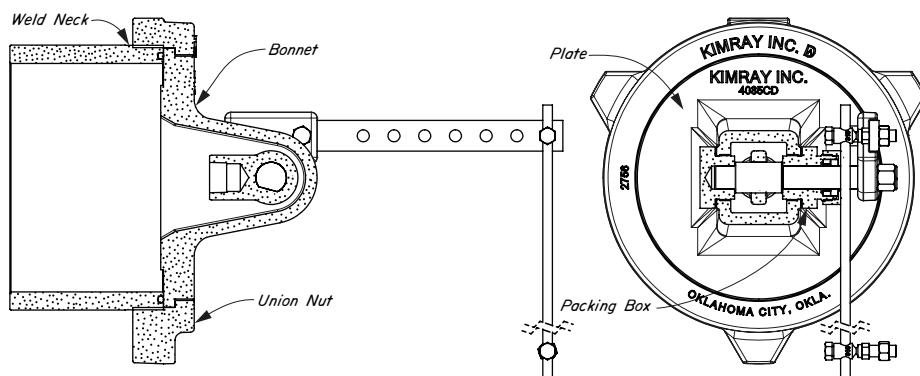


Table 7 - Temperature vs. Pressure Rating

ASTM Class Temperature °F (°C)	Flange Class
	150 RF
	Static Test Pressure (psig)
	450 (31 bar)
Maximum Allowable Non-Shock Pressure (psig)	
CAST DUCTILE ASTM A-395	
	Flange Class
	150 RF
	-20 to 100 (-28 to 37)
	250 (17.2 bar)
	200 (93) 235 (16.2 bar)
	300 (148) 215 (14.8 bar)
	400 (204) 200 (13.7 bar)
	500 (260) 170 (11.7 bar)
	600 (315) 140 (9.6 bar)
	650 (343) 125 (8.6 bar)
	700 (371)
CAST STEEL ASTM A-216 - WCB	
	Flange Class
	150 RF
	-20 to 100 (-28 to 37)
	285 (20.0 bar)
	200 (93) 260 (17.9 bar)
	300 (148) 230 (15.9 bar)
	400 (204) 200 (13.8 bar)
	500 (260) 170 (11.7 bar)
	600 (315) 140 (9.7 bar)
	650 (343) 125 (8.6 bar)
	700 (371) 110 (7.6 bar)

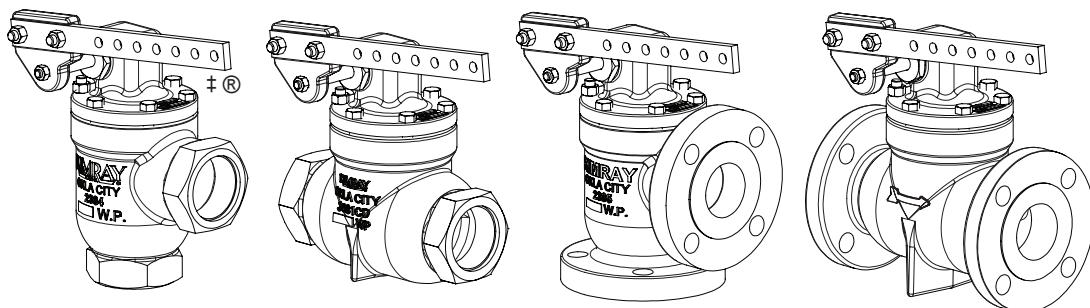

SCREWED ANGLED (NPT)

SCREWED THRU (NPT)

FLANGED ANGLED (150RF)

FLANGED THRU (150RF)

Kimray valves conform to ASME B16.34-2009 for working pressure vs working temperature & ASME B16.5-1996 for flanges and flanged fittings.